

Product datasheet

Specifications



ARGUS standard indoor, false ceiling 360° - carton

CCT56P001

Price: 84,818.18 NGN

Main

Range of product	ARGUS standard movement detector
Range	ARGUS
Product or component type	Movement detector
Load type	Incandescent lamp: 1000 W, AC Halogen lamp: 1000 W, AC Low voltage halogen lamp with wire-wound transformer: 500 VA Low voltage halogen lamp with electronic transformer: 250 VA Fluorescent tube: 200 VA, AC Compact fluorescent lamp: 3 x 23 W, AC Capacitive: : 6 A, 21 μ F, AC Capacitive: : 10 A, 14 μ F, AC
Colour tint	White
Type of packing	Carton

Complementary

[Ue] rated operational voltage	220...240 V
Network frequency	50 Hz
[Ue] rated operational voltage	220...240 V
Number output current	10 A
Type of setting	Light sensitivity adjustable Time adjustment
Time delay	5 s...10 min
Light intensity adjustment	5...2000 lux
Horizontal detection angle	0...360 °
detection range	Radius: 3.9 m
Material	ABS + PC matt
Device mounting	Ceiling
Mounting height	3 m

Environment

Condition of use	Indoor use only
IP degree of protection	IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	7.000 cm
Package 1 Width	12.500 cm
Package 1 Length	13.000 cm
Package 1 Weight	284.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	24
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	7.271 kg
Unit Type of Package 3	P12
Number of Units in Package 3	576
Package 3 Height	105.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	186.560 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[How this information helps you >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **No**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant**

REACH Regulation [REACH Declaration](#)

China RoHS Regulation [China RoHS declaration](#)

Use Again

Repack and remanufacture

[Circularity Profile](#)

[End of Life Information](#)

WEEE

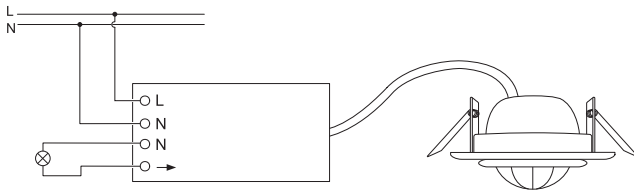


The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Take-back **No**

Technical Illustration

Wiring diagram

**⚠ ⚠ DANGER****HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**

The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.