Specifications



AvatarOn, push button for doorbell, 10A, 250V, Wine Gold

E8331BPL1_WG

Main

Product or component type	Push-button
Device application	Doorbell
Colour tint	Wine gold
Colour tint	Wine gold

Complementary

· · · · · · · · · · · · · · · · · ·		
Device presentation	Complete product	
Rated current	10 A at 250 V AC 50/60 Hz	
Number of gangs	1 gang	
Number of rocker	1	
Clamping connection capacity	3 x 2.5 mm ² for solid cable(s) 3 x 2.5 mm ² for stranded cable(s) 4 x 1.5 mm ² for solid cable(s) 4 x 1.5 mm ² for stranded cable(s)	
Connections - terminals	Brass terminal	
Material	Polycarbonate: grid plate Polycarbonate: base Polycarbonate: dolly Polycarbonate: frame Polycarbonate + GF 20 %: actuator	
Marking	Bell symbol	
Device mounting	Surface Flush	
Width	86 mm	
Height	86 mm	

Environment

IP degree of protection	IP20
Maximum ambient air temperature for operation	45 °C
Operating altitude	2000 m
Relative humidity	095 %
Standards	MS IEC 60669-1 SS 227-1 BS EN 60669-1 IEC 60669-1
Environmental characteristic	UV resistant


List Price displayed is VAT EXCLUSIVE.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.4 cm
Package 1 Width	8.6 cm
Package 1 Length	8.6 cm
Package 1 Weight	81.0 g
Unit Type of Package 2	BB1
Number of Units in Package 2	60
Package 2 Height	21.0 cm
Package 2 Width	30.0 cm
Package 2 Length	39.5 cm
Package 2 Weight	5.636 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

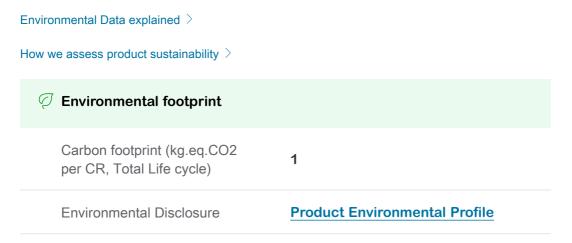

Use Better

S Materials and Substances	
Minimum percentage of recycled plastic content	12
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Νο
EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration
China RoHS Regulation	China RoHS declaration

Use Again

\circlearrowright Repack and remanufacture	
Circularity Profile	No need of specific recycling operations