Product data sheet

Specifications



① Discontinued

AvatarOn, socket-outlet, 10A, 2 x 2P, Universal Socket, White

E83426U2_WE

() Discontinued on: Jun 5, 2023

Main

Product or component type	Socket-outlet
Device presentation	Complete product
Load type	Resistive
Colour tint	Light wood
Outlet poles configuration	2 x 2P
Outlet standard deviation	Universal

Complementary

J	
Rated current	10 A at 250 V AC 50 Hz
Socket number	2
Clamping connection capacity	1 x 42 x 4 mm ² for solid cable(s) 1 x 42 x 4 mm ² for stranded cable(s)
	$1 \times 2.52 \times 2.5$ mm ² for solid cable(s)
	1 x 2.52 x 2.5 mm ² for stranded cable(s)
Connections - terminals	Folded terminal
	Brass pillar
Material	Polycarbonate grid plate
	Polycarbonate surround
Device mounting	Surface
	Flush
Width	86 mm
Height	86 mm
Depth	26.7 mm
Embedding depth	17 mm

Environment

IP degree of protection	IP20
Maximum ambient air temperature for operation	35 ℃
Ambient air temperature for storage	-545 °C
Relative humidity	095 %
Environmental characteristic	No UV resistant
Operating altitude	5000 m
Standards	GB 2099.1


List Price displayed is VAT EXCLUSIVE.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.7 cm
Package 1 Width	8.6 cm
Package 1 Length	8.6 cm
Package 1 Weight	75.0 g
Unit Type of Package 2	BB1
Number of Units in Package 2	60
Package 2 Height	21.0 cm
Package 2 Width	30.0 cm
Package 2 Length	39.5 cm
Package 2 Weight	5.306 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

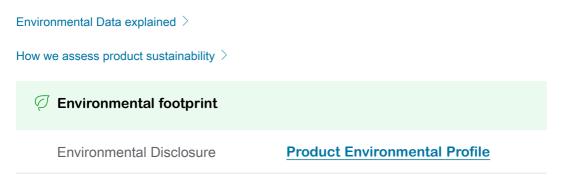

Use Better

S Materials and Substances	
Minimum percentage of recycled plastic content	12
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
China RoHS Regulation	China RoHS declaration

Use Again

