# **Product data sheet**

Specifications



#### ① Discontinued

#### Main

| Main                       |                  |
|----------------------------|------------------|
| Product or component type  | Socket-outlet    |
| Device presentation        | Complete product |
| Load type                  | Resistive        |
| Colour tint                | Light wood       |
| Outlet poles configuration | 2 x 2P           |
| Outlet standard deviation  | Universal        |

() Discontinued on: May 19, 2023

E83426U2\_WG

AvatarOn, socket-outlet, 10A, 2 x 2P, Universal Socket, Wine Gold

### Complementary

| J                            |   |  |
|------------------------------|---|--|
| Rated current                | 10 A at 250 V AC 50 Hz  |  |
| Socket number                | 2   |  |
| Clamping connection capacity | 1 x 42 x 4 mm <sup>2</sup> for solid cable(s)<br>1 x 42 x 4 mm <sup>2</sup> for stranded cable(s) |  |
|                              | $1 \times 2.52 \times 2.5$ mm <sup>2</sup> for solid cable(s)                                     |  |
|                              | 1 x 2.52 x 2.5 mm <sup>2</sup> for stranded cable(s)  |  |
| Connections - terminals      | Folded terminal   |  |
|                              | Brass pillar  |  |
| Material                     | Polycarbonate grid plate  |  |
|                              | Polycarbonate surround  |  |
| Device mounting              | Surface   |  |
|                              | Flush   |  |
| Width                        | 86 mm   |  |
| Height                       | 86 mm   |  |
| Depth                        | 26.7 mm   |  |
| Embedding depth              | 17 mm   |  |

#### **Environment**

| IP degree of protection                       | IP20            |
|---|-----------------|
| Maximum ambient air temperature for operation | 35 °C           |
| Ambient air temperature for storage           | -545 °C         |
| Relative humidity                             | 095 %           |
| Environmental characteristic                  | No UV resistant |
| Operating altitude                            | 5000 m          |
| Standards                                     | GB 2099.1       |


List Price displayed is VAT EXCLUSIVE.

# **Packing Units**

| Unit Type of Package 1       | PCE      |
|------------------------------|----------|
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 2.7 cm   |
| Package 1 Width              | 8.6 cm   |
| Package 1 Length             | 8.6 cm   |
| Package 1 Weight             | 75.0 g   |
| Unit Type of Package 2       | BB1      |
| Number of Units in Package 2 | 60       |
| Package 2 Height             | 21.0 cm  |
| Package 2 Width              | 30.0 cm  |
| Package 2 Length             | 39.5 cm  |
| Package 2 Weight             | 5.306 kg |

# Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

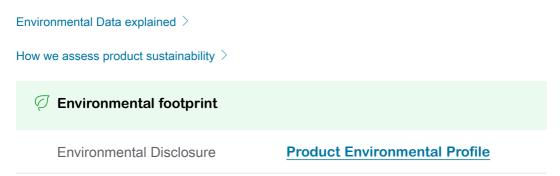

## **Use Better**

| S Materials and Substances                     |                          |
|--|--------------------------|
| Minimum percentage of recycled plastic content | 12                       |
| Packaging made with recycled cardboard         | Yes                      |
| Packaging without single use plastic           | Νο                       |
| EU RoHS Directive                              | Compliant                |
| REACh Regulation                               | <b>REACh Declaration</b> |
| China RoHS Regulation                          | China RoHS declaration   |

## **Use Again**

| $\circlearrowright$ Repack and remanufacture |  |
|--|--|
| Circularity Profile                          | No need of specific recycling operations |
| Take-back                                    | Νο                                       |