


# Bảng thông số sản phẩm

Thông số kỹ thuật



multifunction relay, Harmony Timer Relays, 5A, 2CO, 0.02s...300h, time delay, 24...240V AC DC

RE48AML12MW

## Main

Range of product	Harmony Timer Relays
product or component type	Panel-mounted/plug-in timer relay
Electrical connection	Plug-in sub-base 11 pin(s)
Width	48 mm
Discrete output type	Relay
Contacts type and composition	2 C/O timed contacts, AgNi (cadmium free)
Component name	RE48A
time delay type	Power on-delay Interval Off-delay Symmetrical flashing
time delay range	0.5...30 s 5...300 s 0.2...12 min 0.5...30 h 2...120 s 0.05...3 s 0.2...12 s 0.02...1.2 s 2...120 min 5...300 min 0.5...30 min 5...300 h 2...120 h 0.2...12 h
[Us] rated supply voltage	24...240 V AC/DC 50/60 Hz
Voltage range	0.85...1.1 Us AC 0.9...1.1 Us DC
[In] rated current	5 A

## Complementary

Product front plate size	48 x 48 mm
Control type	Selector switch front panel
Housing material	Self-extinguishing
Repeat accuracy	+/- 0.2 % of the maximum setting value conforming to IEC 61812-1
Temperature drift	+/- 0.02 %/°C of the maximum setting value conforming to IEC 61812-1
Voltage drift	+/- 0.2 %/V of the maximum setting value at 48...240 V +/- 1 %/V of the maximum setting value at 24...48 V
Setting accuracy of time delay	+/- 5 % of full scale at 25 °C conforming to IEC 61812-1
Minimum pulse duration	20 ms

<b>Reset time</b>	25 ms on de-energisation
<b>Pick up duration</b>	55 ms
<b>On-load factor</b>	100 %
<b>Power consumption in VA</b>	1.1 VA at 24 V 4.8 VA at 240 V
<b>Power consumption in W</b>	0.5 W at 24 V 1.7 W at 240 V
<b>Breaking capacity</b>	1250 VA
<b>Minimum switching current</b>	100 mA
<b>Maximum switching current</b>	5 A
<b>Maximum switching voltage</b>	250 V AC/DC
<b>Electrical durability</b>	100000 cycles
<b>Mechanical durability</b>	30000000 cycles
<b>Output voltage</b>	240 V at 5 A AC-12 30 V at 2 A DC-13 240 V at 1.5 A AC-15
<b>marking</b>	CE
<b>Surge withstand</b>	1 kV differential mode conforming to IEC 61000-4-5 level 3 2 kV common mode conforming to IEC 61000-4-5 level 3
<b>mounting support</b>	Base mounted: socket Panel mounted: system supplied with the product
<b>Local signalling</b>	1 LED (yellow) for output relay state LED indicator (green) for flashing: relay energised timing in progress LED indicator (green) for on steady: relay energised, no timing in progress
<b>Function available</b>	A- Power on-delay relay-2 C/O B- Single interval relay w/ control signal-2 C/O C- Off-delay relay w/ control signal-2 C/O Di- Symmetrical flashing relay (starting pulse-on)-2 C/O
<b>Control type</b>	Without test button
<b>net weight</b>	0.14 kg
<b>Shape of pin</b>	Cylindrical
<b>Number of functions</b>	4

## Environment

<b>Humidity drift</b>	+/- 0.05 %/%RH of the maximum setting value conforming to IEC 61812-1
<b>Immunity to microbreaks</b>	10 ms
<b>Dielectric strength</b>	1 kV 1 mA/1 minute conforming to IEC 61812-1
<b>Protection against electric shocks</b>	4 kV class III conforming to IEC 60664-1 4 kV class III conforming to IEC 61812-1
<b>Standards</b>	IEC 61812-1 EN 50081-1/2 93/68/EEC 89/336/EEC EN 50082-1/2 IEC 60669-2-3 73/23/EEC
<b>Product certifications</b>	UL cULus CSA C-Tick
<b>Ambient air temperature for storage</b>	-40...70 °C

<b>Ambient air temperature for operation</b>	-20...50 °C
<b>IP degree of protection</b>	IP40 (housing) conforming to IEC 60529 IP50 (front face) conforming to IEC 60529
<b>Vibration resistance</b>	0.35 mm (f= 10...55 Hz) conforming to IEC 60068-2-6
<b>Relative humidity</b>	93 % without condensation conforming to IEC 60068-2-3
<b>Resistance to electrostatic discharge</b>	6 kV in contact conforming to IEC 61000-4-2 level 3 8 kV in air conforming to IEC 61000-4-2 level 3
<b>Resistance to electromagnetic fields</b>	10 V/m 26 MHz to 1 GHz conforming to IEC 61000-4-3 level 3
<b>Resistance to fast transients</b>	2 kV (capacitive connecting clip) conforming to IEC 61000-4-4 level 4 4 kV (direct) conforming to IEC 61000-4-4 level 4
<b>Immunity to radioelectric fields</b>	10 V (0.15...80 MHz) conforming to IEC 61000-4-6 level 3
<b>Immunity to voltage dips</b>	30 % / 10 ms conforming to IEC 61000-4-11 60 % / 100 ms conforming to IEC 61000-4-11 95 % / 5 s conforming to IEC 61000-4-11
<b>Disturbance radiated/conducted</b>	Class B 0.15...30 MHz conforming to EN 55022 (EN 55011 group 1)

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	5.7 cm
<b>Package 1 Width</b>	6.2 cm
<b>Package 1 Length</b>	10.5 cm
<b>Package 1 Weight</b>	130 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	30
<b>Package 2 Height</b>	15 cm
<b>Package 2 Width</b>	30 cm
<b>Package 2 Length</b>	40 cm
<b>Package 2 Weight</b>	4.35 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Bền vững

Nhãn **Green Premium™** là cam kết của Schneider Electric trong việc cung cấp sản phẩm với hiệu suất môi trường tốt nhất. Green Premium cam kết tuân thủ các quy định mới nhất, minh bạch về tác động môi trường, cũng như các sản phẩm tuần hoàn và CO<sub>2</sub> thấp.

**Hướng dẫn đánh giá tính bền vững của sản phẩm** là tài liệu kỹ thuật phổ thông giúp làm rõ các tiêu chuẩn nhãn sinh thái toàn cầu và cách diễn giải việc khai báo môi trường.

[Tìm hiểu thêm về Green Premium >](#)


[Hướng dẫn đánh giá về sự bền vững của sản phẩm >](#)



Minh bạch **RoHS/REACH**

## Hiệu suất sức khỏe

 Mercury Free

 RoHS Exemption Information [Yes](#)

## Chứng nhận & Tiêu chuẩn

Reach Regulation

[REACH Declaration](#)

Eu RoHS Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China RoHS Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile

[End of Life Information](#)


# Bảng thông số sản phẩm

# RE48AML12MW

## Dimensions Drawings

Width 48 mm


---

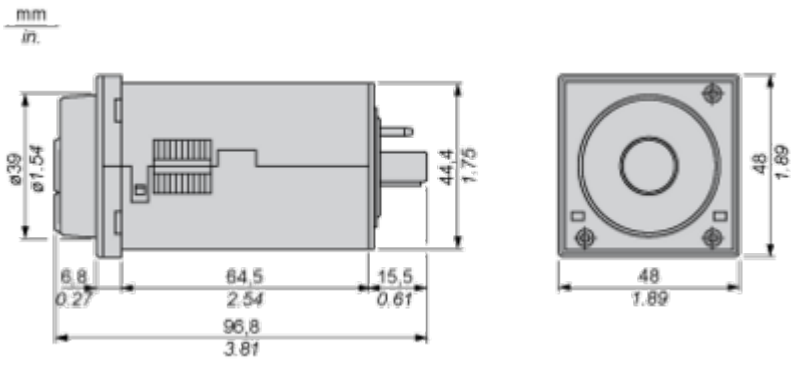

## Mounting and Clearance

### Panel Cut-Out and Mounting


#### Panel Cut-Out

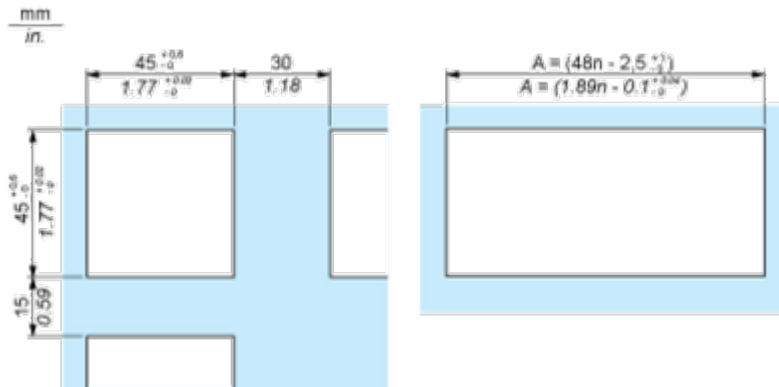

n Number of devices mounted side-by-side

#### Mounting

Cover positioning and mounting

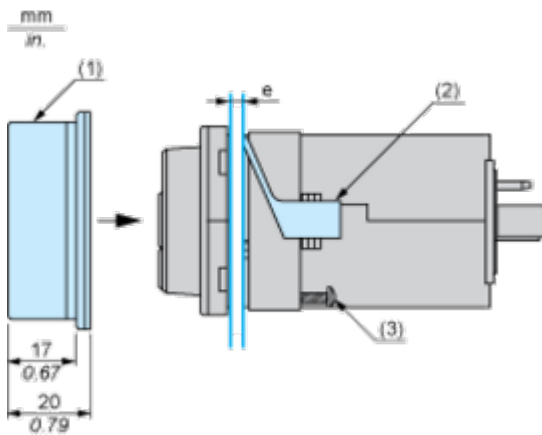

e Panel thickness

1 Protective cover


2 Panel mounting frame

3 Locating screw

## Connections and Schema

### Wiring Diagram

---

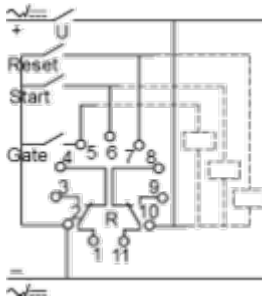


Technical Description

**Function A : Power on Delay Relay**

---

**Description**

The timing period T begins on energisation. After timing, the output R closes.

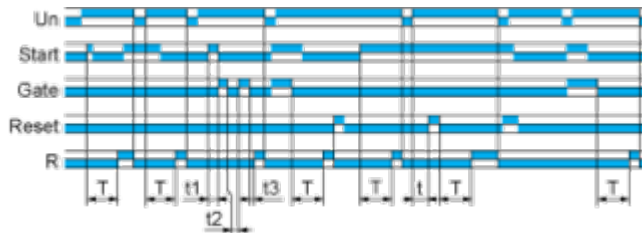

$$T = t1 + t2 + t3$$




## Function B : Interval Relay with Control Signal

---

### Description

After power-up, pulsing or maintaining control contact C starts the timing T. The output R closes for the duration of the timing period T then reverts to its initial state.

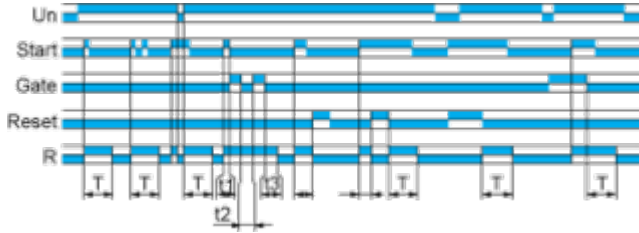


$$T = t1 + t2 + t3$$

**Function C : Off-Delay Relay with Control Signal**

---

**Description**

After power-up and closing of the control contact, the output closes. When control contact re-opens, timing T starts. At the end of the timing period, the output reverts to their initial state.

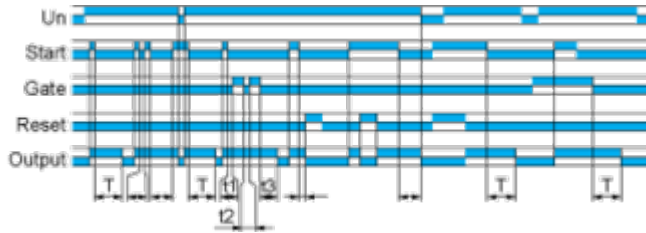


$$T = t1 + t2 + t3$$

**Function Di : Symmetrical Flasher Relay (Starting Pulse On)**

---



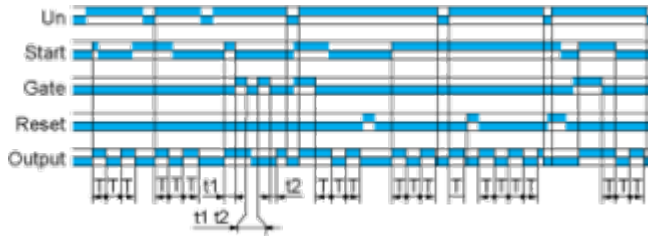

**Description**

Repetitive cycle with two timing periods T of equal duration, with output changing state at the end of each timing period T.



## Legend

---

	Relay de-energised
	Relay energised
	Output open
	Output closed

C	Control contact
G	Gate
R	Relay or solid state output
R1/R2	2 timed outputs
R2 inst.	The second output is instantaneous if the right position is selected
T	Timing period
Ta -	Adjustable On-delay
Tr -	Adjustable Off-delay
U	Supply