

Bảng thông số sản phẩm

Thông số kỹ thuật



Complete pre wired monolithic tower light, Harmony XVC, plastic, red orange green blue, 40mm, tube mounting, steady or flashing, buzzer, IP23, 24V AC DC

XVC4B45S

Main

Range of product	Harmony XVC4
product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	4 illuminated units
Sound signalling	Buzzer
Mounting diameter	40 mm
Component name	XVC
Device short name	XVC
Light source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green LED steady or flashing blue
Supply circuit type	AC/DC
Noise level	70...85 dB (continuous or intermittent tone) at 1 m

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover SGP (chromium-plated): support tube
mounting location	On support tube, 17 mm
Product mounting	On support tube, 17 mm
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
cable cross section	0.33 mm ²
AWG gauge	AWG 22
Cable length	900 mm
marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	140 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
net weight	0.66 kg
Height	629.5 mm

Environment

Standards	IEC 61000-6-3 IEC 61000-6-2
Product certifications	UL
protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Electrical shock protection class	Class I conforming to IEC 61140
Overvoltage category	Class I conforming to IEC 61140
IP degree of protection	IP23 vertical surface installation conforming to IEC 60529

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.6 cm
Package 1 Width	6.6 cm
Package 1 Length	74.9 cm
Package 1 Weight	880.0 g
Unit Type of Package 2	P06
Number of Units in Package 2	10
Package 2 Height	45.0 cm
Package 2 Width	80.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	18.0 kg

Contractual warranty

Warranty	18 months
-----------------	-----------

Bền vững

Nhãn **Green Premium™** là cam kết của Schneider Electric trong việc cung cấp sản phẩm với hiệu suất môi trường tốt nhất. Green Premium cam kết tuân thủ các quy định mới nhất, minh bạch về tác động môi trường, cũng như các sản phẩm tuần hoàn và CO₂ thấp.

Hướng dẫn đánh giá tính bền vững của sản phẩm là tài liệu kỹ thuật phổ thông giúp làm rõ các tiêu chuẩn nhãn sinh thái toàn cầu và cách diễn giải việc khai báo môi trường.

[Tìm hiểu thêm về Green Premium >](#)

[Hướng dẫn đánh giá về sự bền vững của sản phẩm >](#)



Minh bạch

Hiệu suất sức khỏe

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

Eu Rohs Directive [Pro-active compliance \(Product out of EU RoHS legal scope\)](#)

China Rohs Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)


Circularity Profile [End of Life Information](#)

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

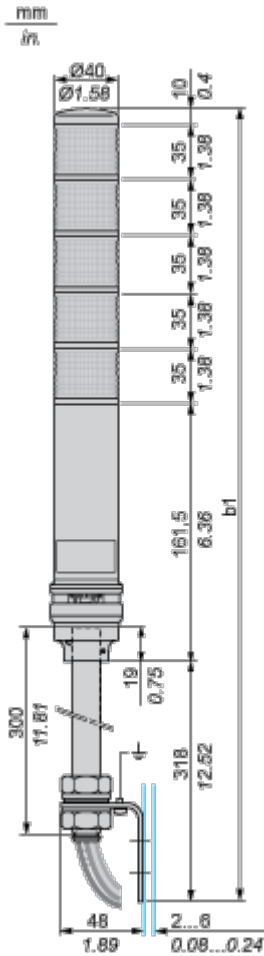

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	524.50	20.65
2 stages	559.50	22.03
3 stages	594.50	23.41
4 stages	629.50	24.78
5 stages	664.50	26.16

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

